

## N-Channel Enhancement Mode Power MOSFET

### Description


The HM4402D uses advanced trench technology and design to provide excellent  $R_{DS(ON)}$  with low gate charge. It can be used in a wide variety of applications.

### General Features


- $V_{DS} = 20V, I_D = 15A$
- $R_{DS(ON)} < 8m\Omega @ V_{GS}=4.5V$
- $R_{DS(ON)} < 8.5m\Omega @ V_{GS}=2.5V$
- High density cell design for ultra low Rdson
- Fully characterized Avalanche voltage and current

### Application


- DC/DC Converter
- Notebook Vcore



Schematic diagram

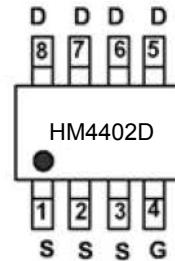

Marking and pin Assignment

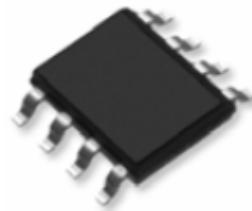

SOP-8 top view

### Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
HM4402D	HM4402D	SOP-8	Ø330mm	12mm	2500 units

### Absolute Maximum Ratings ( $T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	20	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Drain Current-Continuous	$I_D$	15	A
Drain Current-Continuous( $T_A=100^\circ C$ )	$I_D (100^\circ C)$	10.5	A
Pulsed Drain Current	$I_{DM}$	45	A
Maximum Power Dissipation	$P_D$	2.5	W
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 To 150	°C

### Thermal Characteristic

Thermal Resistance, Junction-to-Ambient <sup>(Note 2)</sup>	$R_{\theta JA}$	50	°C/W
---	-----------------	----	------

**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise noted)**


Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	20	-	-	V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	$\mu\text{A}$
Gate-Body Leakage Current	$I_{\text{GSS}}$	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	nA
<b>On Characteristics</b> (Note 3)						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	0.4		1.2	V
Drain-Source On-State Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=6\text{A}$	-	5	8	$\text{m}\Omega$
		$V_{\text{GS}}=2.5\text{V}, I_{\text{D}}=5\text{A}$		5.5	8.5	$\text{m}\Omega$
Forward Transconductance	$g_{\text{FS}}$	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=6\text{A}$	20	-	-	S
<b>Dynamic Characteristics</b> (Note 4)						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{DS}}=10\text{V}, V_{\text{GS}}=0\text{V}, F=1.0\text{MHz}$	-	2000	-	PF
Output Capacitance	$C_{\text{oss}}$		-	402	-	PF
Reverse Transfer Capacitance	$C_{\text{rss}}$		-	170	-	PF
<b>Switching Characteristics</b> (Note 4)						
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=10\text{V}, I_{\text{D}}=6\text{A}$ $V_{\text{GS}}=4.5\text{V}, R_{\text{GEN}}=1\Omega$	-	25	-	nS
Turn-on Rise Time	$t_r$		-	15	-	nS
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$		-	25	-	nS
Turn-Off Fall Time	$t_f$		-	15	-	nS
Total Gate Charge	$Q_g$	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=6\text{A}, V_{\text{GS}}=10\text{V}$	-	42	-	nC
Gate-Source Charge	$Q_{\text{gs}}$		-	10.8	-	nC
Gate-Drain Charge	$Q_{\text{gd}}$		-	9.2	-	nC
<b>Drain-Source Diode Characteristics</b>						
Diode Forward Voltage (Note 3)	$V_{\text{SD}}$	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=6\text{A}$	-	-	1.2	V
Diode Forward Current (Note 2)	$I_{\text{S}}$		-	-	15	A

**Notes:**


1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board,  $t \leq 10$  sec.
3. Pulse Test: Pulse Width  $\leq 300\mu\text{s}$ , Duty Cycle  $\leq 2\%$ .
4. Guaranteed by design, not subject to production

### Test Circuit


#### 1) E<sub>AS</sub> Test Circuits

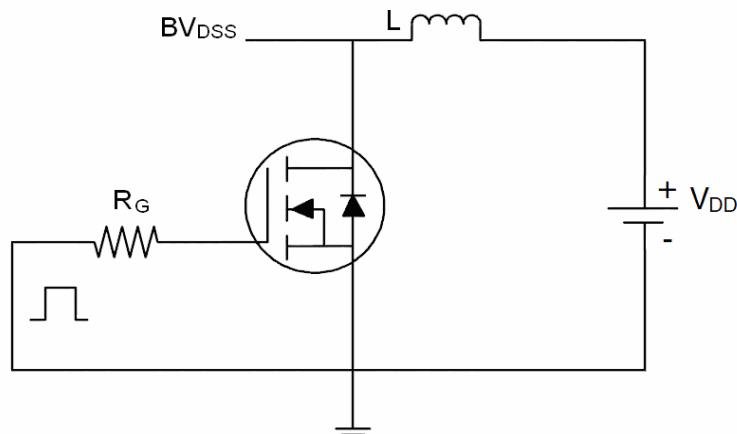


#### 2) Gate Charge Test Circuit

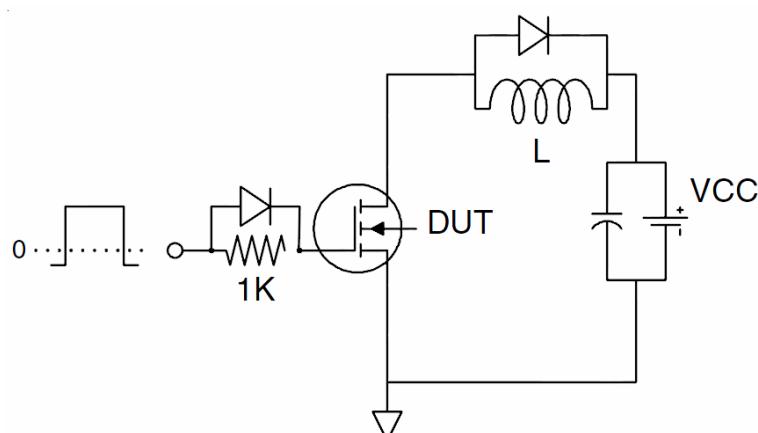


#### 3) Switch Time Test Circuit

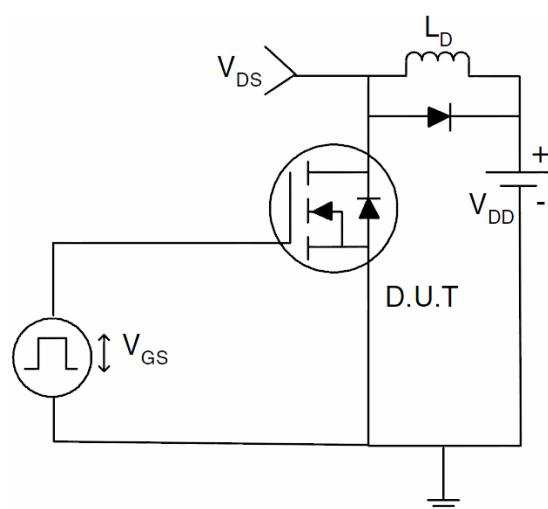


### Typical Electrical and Thermal Characteristics (Curves)

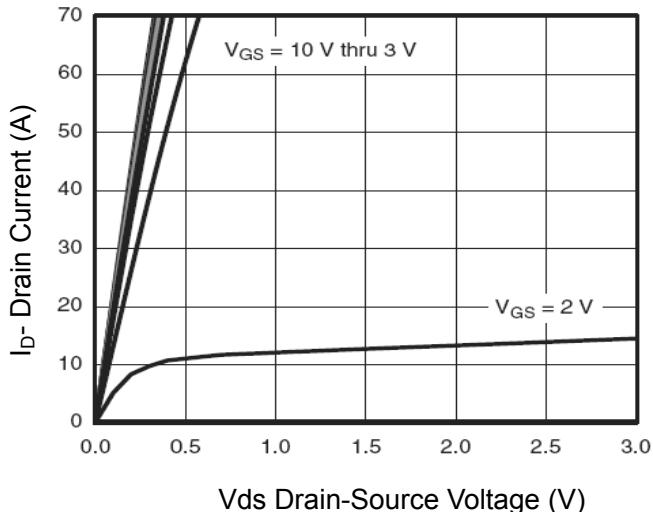


**Figure 1 Output Characteristics**

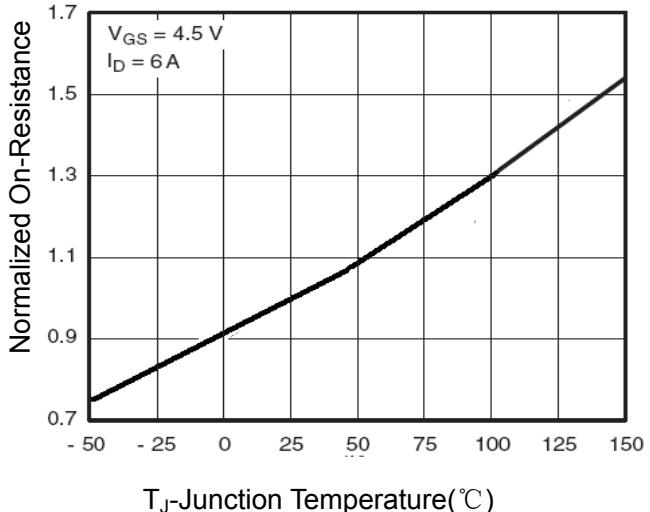


**Figure 4 Rdson-Junction Temperature**

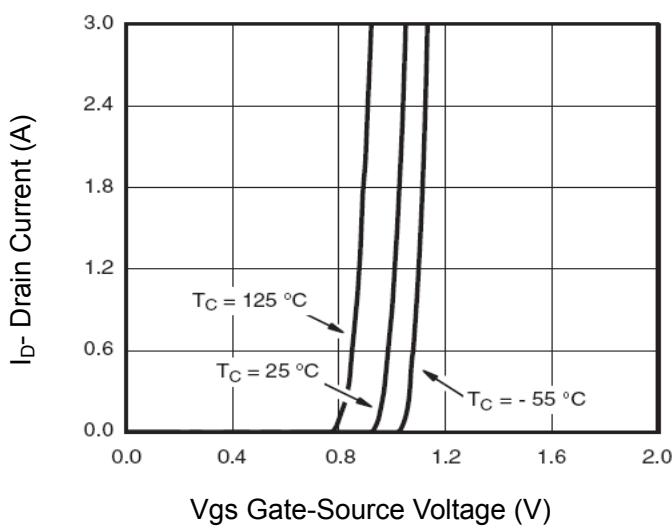


**Figure 2 Transfer Characteristics**

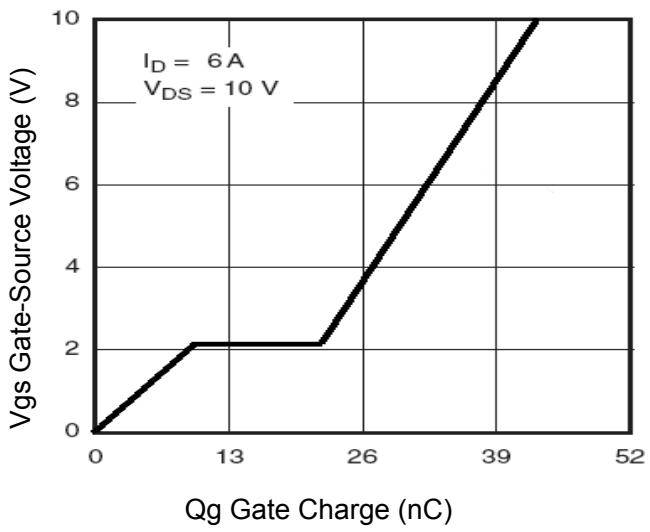

**Figure 5 Gate Charge**

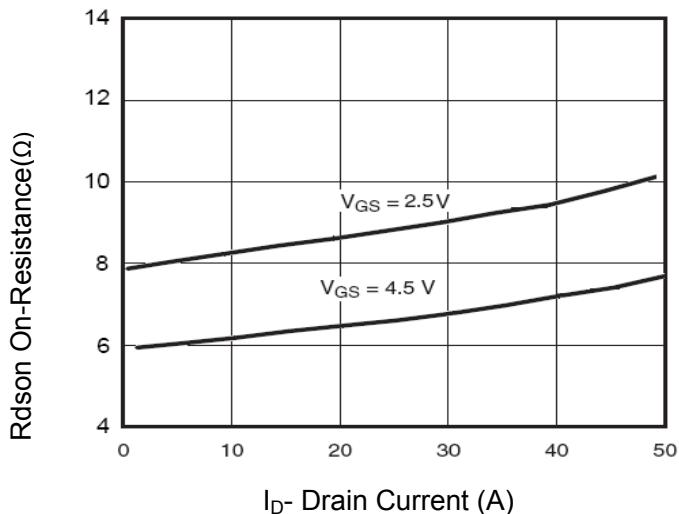

**Figure 3 Rdson- Drain Current**

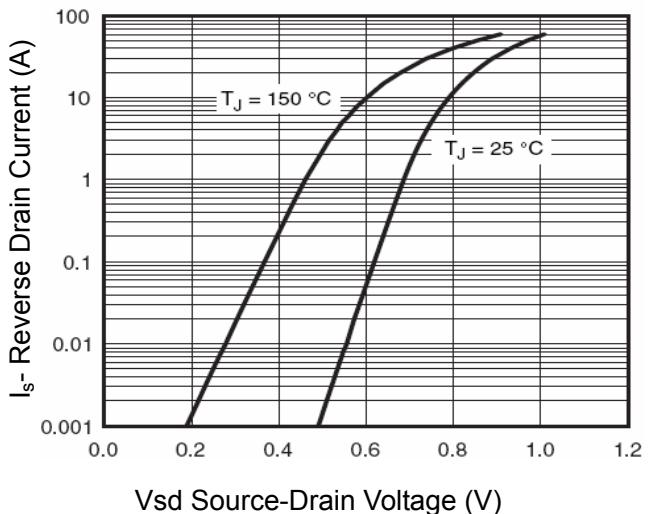

**Figure 6 Source- Drain Diode Forward**

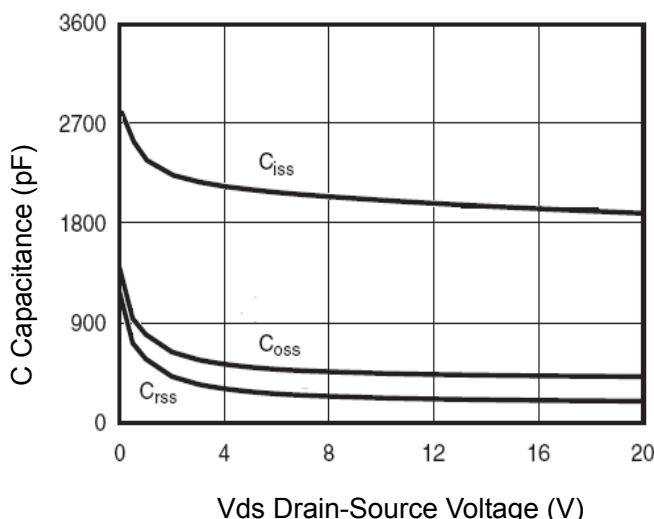


Figure 7 Capacitance vs Vds

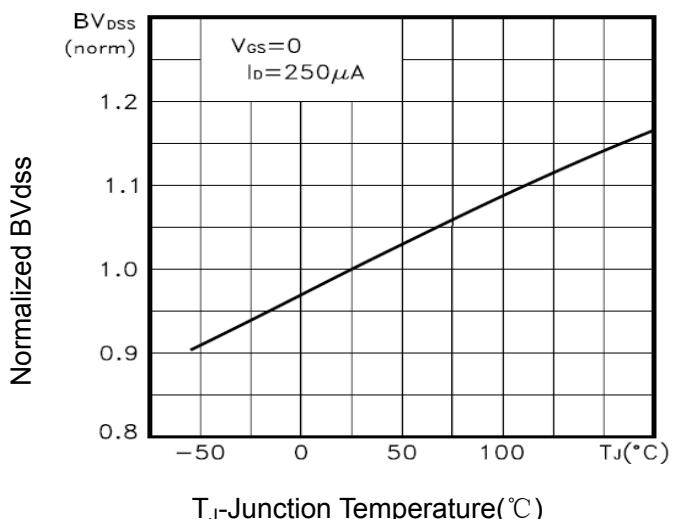


Figure 9  $BV_{dss}$  vs Junction Temperature

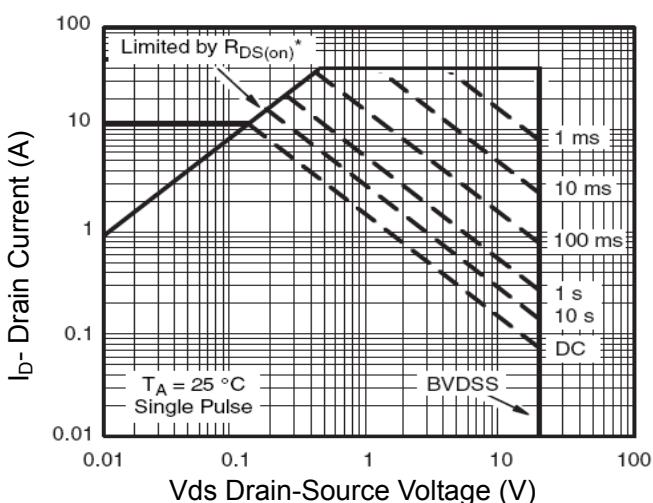


Figure 8 Safe Operation Area

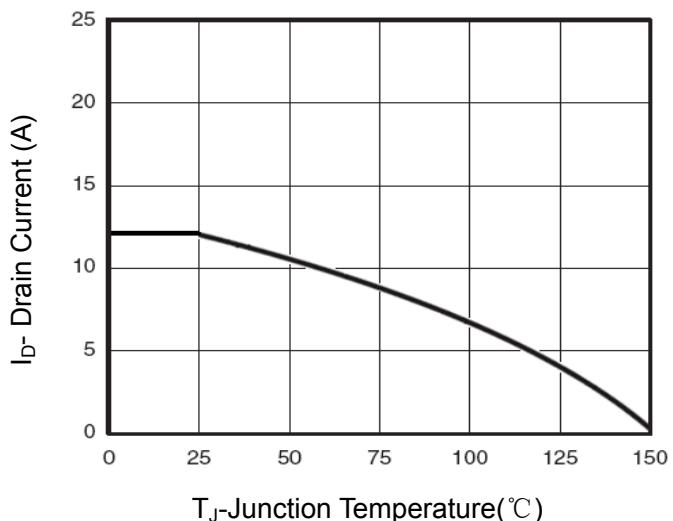


Figure 10 Current vs Junction Temperature


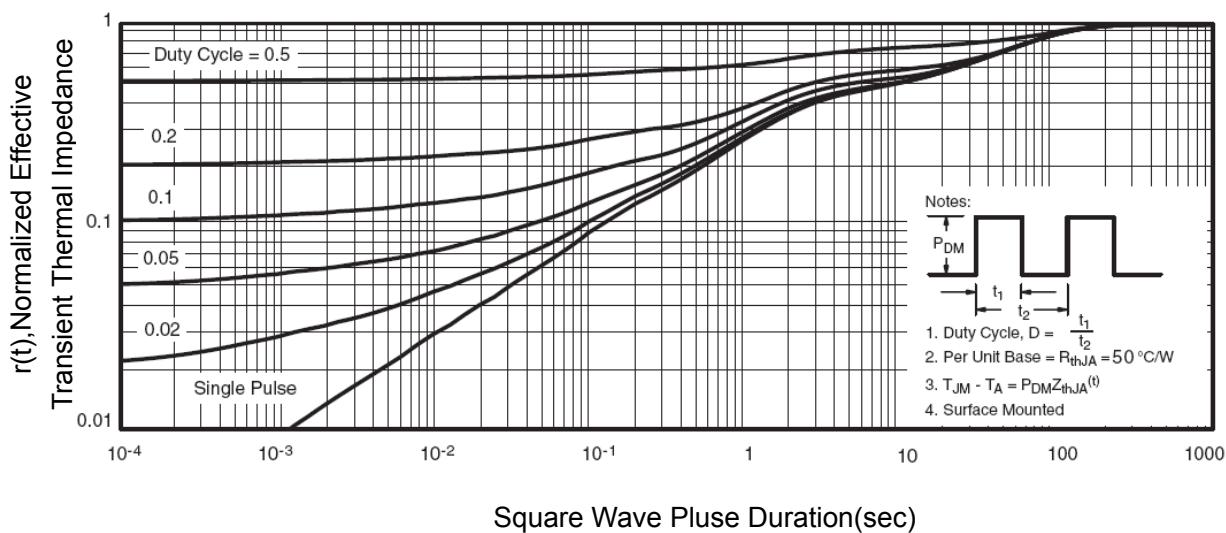


Figure 11 Normalized Maximum Transient Thermal Impedance

SOP-8 Package Information

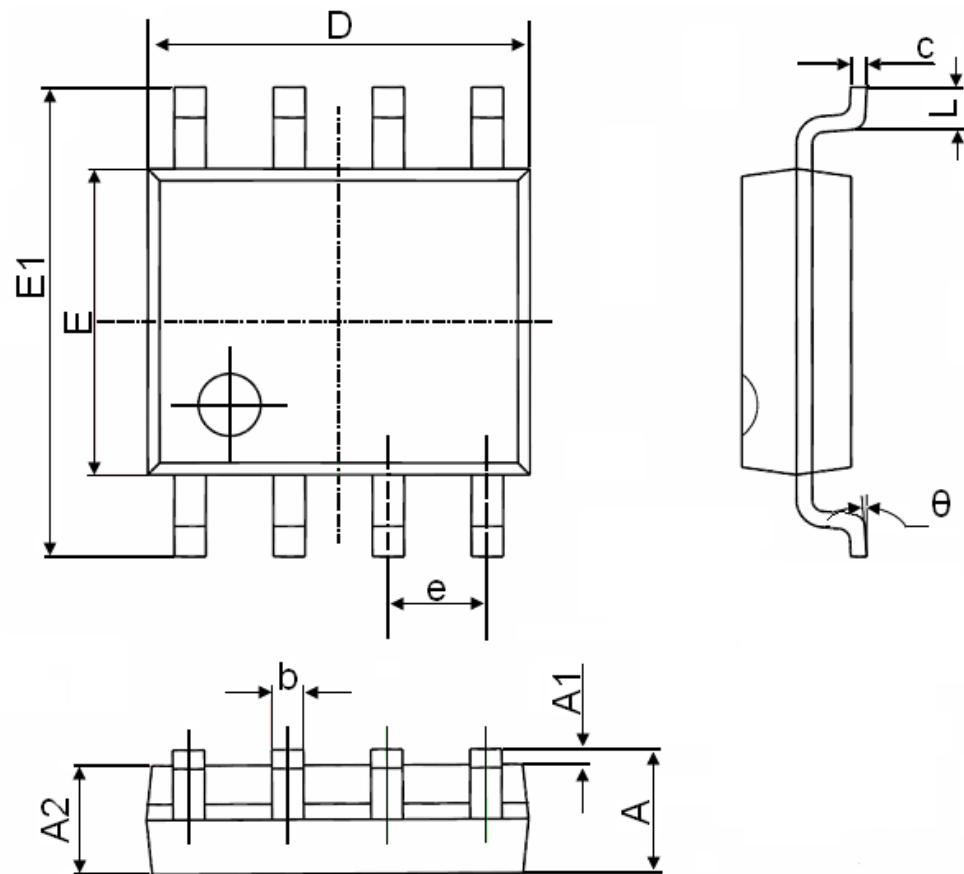

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°